arXiv:1211.3469v1 [cond-mat.quant-gas] 15 Nov 2012

Optimizing the efficiency of evaporative cooling in optical dipole traps

Abraham J. Olson,* Robert J. Niffenegger, and Yong P. Chen
Department of Physics,
Purdue University, West Lafayette IN 47907
(Dated: November 16, 2012)

We present a combined computational and experimental study to optimize the efficiency of evaporative cooling of optically-trapped atoms. We employ a kinetic model of evaporation to determine the optimal relation of trap depth to average trap frequency given experimental initial conditions. We then experimentally implement a highly efficient evaporation process in a misaligned crossed-beam far off-resonance optical dipole trap (MACRO-FORT), showing excellent agreement between the theory and experiment. This method has allowed the creation of Bose-Einstein condensates of ^{87}Rb with 2×10^4 atoms starting from only a few 10^5 atoms initially loaded in the optical trap.

PACS numbers: 64.70.fm, 67.85.Hj

Over the last 30 years, the control and study of ultracold atoms has continued to impress. Initial studies in both optical [1] and magnetic [2] confinement of neutral atoms led to the realization that evaporative cooling could create colder atom temperatures [3]. Subsequently, evaporative cooling played a critical role in realizing atomic Bose-Einstein condensates (BECs) [4–6] and degenerate Fermi gases [7]. Though primarily used as a tool in the creation of quantum degenerate gases, evaporative cooling also presents interesting physics in itself [8–13]. The goal of most evaporative cooling schemes is to optimize the number of atoms, N, that reach quantum degeneracy. Forced evaporation proceeds by lowering the trap depth, U, allowing the hotter atoms to escape the trap while the colder atoms remain and rethermalize. The efficiency of evaporation is characterized by the parameter $\gamma_{eff} = -\log(\rho_f/\rho_i)/\log(N_f/N_i)$, where $\rho = n\lambda_{dB}^3$ is the phase space density, $n = N\bar{\omega}^3[m/(2\pi k_B T)]^{3/2}$ is the calculated peak atomic density, $\lambda_{dB} = \sqrt{2\pi\hbar^2/mk_BT}$ is the thermal deBroglie wavelength, T is the atoms' temperature, $\bar{\omega}$ is the average trap frequency, m is the atomic mass, k_B is Boltzmann's constant, and $\hbar$ is the reduced Planck's constant.

Atom losses via three-body combination and one-body background collisions limit the attainable efficiency in most experimental evaporative cooling processes [14]. The rates of these losses, Γ_{3B} and Γ_{1B} respectively, should be kept small compared to the rate of evaporation, Γ_{ev}. The evaporation rate depends on the elastic collision rate of the atoms, Γ_{el}, and the ratio of the trap depth to atom cloud temperature $\eta = U/k_BT$. Using a truncated Boltzmann distribution approximation, $\Gamma_{ev} = \lambda\Gamma_{el}$ where $\lambda \approx (\eta-4)e^{-\eta}$ for a 3D harmonic trap when $\eta \geq 6$ [9, 15]. The elastic collision rate of the atoms in a 3D harmonic trap is $\Gamma_{el} = n\sigma\bar{v}/\left(2\sqrt{2}\right)$, where $\sigma = 8\pi a_s^2$ is the elastic cross section, a_s is the s-wave scattering length ($a_s = 98a_0$ for ^{87}Rb where a_0 is Bohr radius [16]), and $\bar{v} = 4(k_BT/\pi m)^{1/2}$ is the average relative velocity of the atoms. The three-body re-combination rate depends on the density distribution and atomic species: $\Gamma_{3B} = L\int n(\vec{r})^3 d\vec{r}/N$, where $L = 4.3(\pm1.8)\times10^{-29}\text{cm}^6/\text{s}$ for ^{87}Rb in the $F = 1$ ground state [17].

Motivated by the accessibility of all magnetic spin states, less stringent vacuum requirements, and the ability to use Feshbach resonances to tune atomic interactions, all-optical trapping is increasingly popular in cold atoms experiments. The simplest and most commonly used evaporative cooling in an optical trap is done by simply lowering the trap laser power, and thus the trap depth. For such evaporation, the average trap frequency is reduced as $\bar{\omega} \propto U^{0.5}$ [18, 19]. Since the collision rate (and thus evaporation rate) decreases with decreasing $\bar{\omega}$, efficient all-optical evaporative cooling can be difficult due to stagnation of the cooling process. To address this limitation, various techniques have been developed to change the relationship of the trap frequency and trap depth ($\bar{\omega} \propto U^{\nu}$) during the evaporation, such as the zoom lens trap [20], tilted trap [15, 21], and adding additional lasers for confinement [22]. While these techniques aided in the achievement of BECs, reported values of γ_{eff} have been between 2.5 and 3.5. Little attention has been paid to optimizing the efficiency of the evaporative cooling by optimizing ν. In this work, we optimize the efficiency of evaporation by optimizing both η and ν and experimentally demonstrate a $\gamma_{eff} = 4.2$.

We achieve high efficiency evaporation by choosing an evaporation route that maximizes the evaporation rate while keeping three-body losses low. We experimentally implement this route using a misaligned crossed beam optical dipole force trap (MACRO-FORT), which allows for tailoring ν in the $\bar{\omega} \propto U^{\nu}$ relation [21]. In order to find the optimal route our experimental setup, we model the evaporation by numerically solving the energy and atom number of the atomic cloud as functions of time. For our model, we follow the kinetic theory of Ref. [9]

---

* olsonaj@purdue.edu

which assumes sufficient ergodicity in the trap (see also Refs. [13, 15, 23], noting [24]). We also assume operation in the deep trap ($\eta \geq 6$) regime such that the density distribution is approximated by $n(\vec{r}) = n\exp[-U(\vec{r})/k_B T]$, and trap potential by $U(\vec{r}) = \frac{1}{2}m\left(\omega_x^2 x^2 + \omega_y^2 y^2 + \omega_z^2 z^2\right)$. With this approach, $E = 3Nk_B T$ and the energy and atom number evolution equations take the form:

$$\dot{E} = -N\Gamma_{ev}(\eta+\kappa)k_B T + \nu E\frac{\dot{T}}{T} - \Gamma_{1B}E - \Gamma_{3B}\frac{2}{3}E \quad (1)$$

$$\dot{N} = -(\Gamma_{ev} + \Gamma_{1B} + \Gamma_{3B})N \quad (2)$$

where $\kappa \approx (\eta-5)/(\eta-4)$ for a 3D harmonic trap. In Eqn. 1, the first term accounts for the energy removed by evaporative cooling, the second term for the adiabatic weakening of the trap [25], the last two terms for the energy lost by one-body (e.g. background gas collisions) and three-body processes, respectively. Using this model and given the initial conditions after loading atoms in the optical dipole trap, the ideal values of η and ν can be found to maximize γ_{eff}.

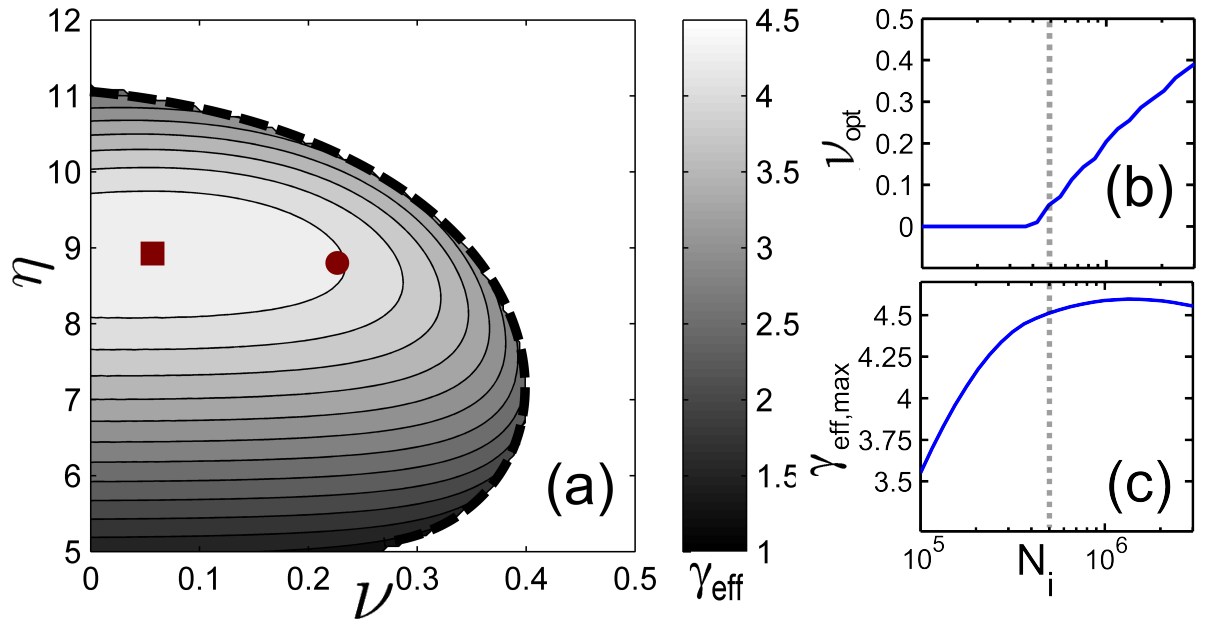

FIG. 1. (a) Numerical solution of the efficiency of evaporation, γ_{eff}, as a function of η and ν given our experimental initial conditions. The solution is presented for parameters of η and ν to achieve $\rho_f = 0.215$ with a total evaporation time $T_{evap} < 10$ s (area bounded by the thick, dotted line). The maximum efficiency, $\gamma_{eff,max}$, for these conditions is 4.51 (square). Our experimental implementation employed values of η and ν that achieved $\gamma_{eff} = 4.2$ (circle). Initial conditions of evaporation are $T = 60$ μK, $N = 5 \times 10^5$, $\bar{\omega} = 2\pi \times 1000$ Hz, $\Gamma_{1B} = 1/12$ sec^{-1}. Since N_i, ρ_i and ρ_f are fixed, γ_{eff} depends only on N_f. (b) and (c): Effect of varying the initial atom number, N_i, while keeping other initial conditions the same as in (a) on the optimal value of ν for evaporation, (b), and resulting $\gamma_{eff,max}$, (c). The grey dashed line marks the value of N_i in our experiment.

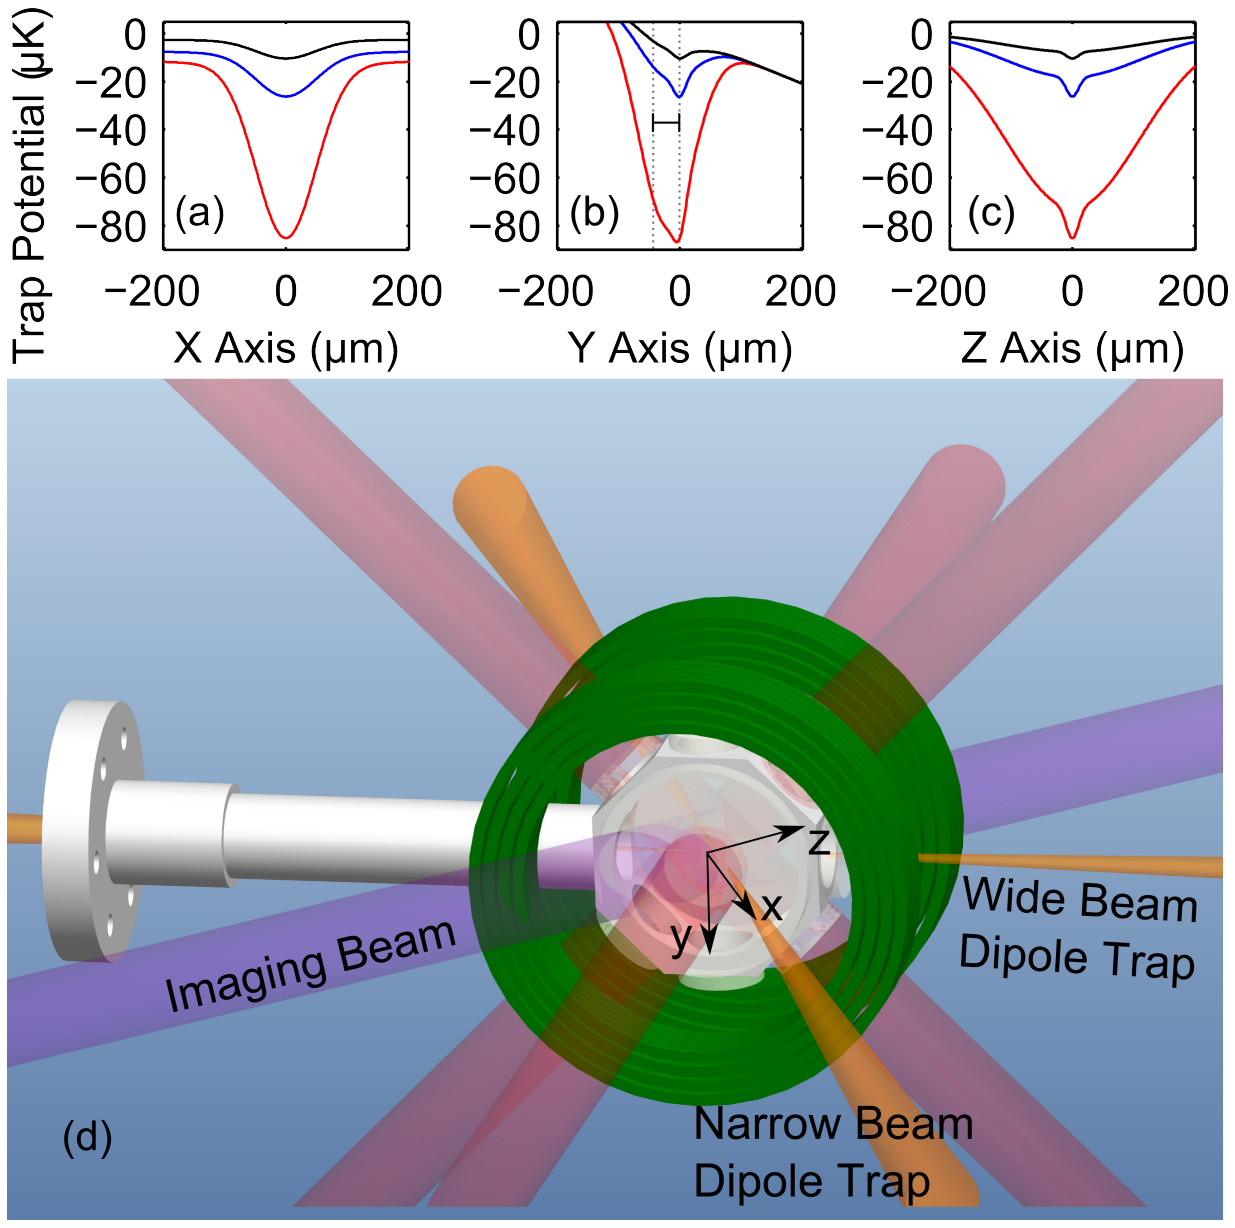

FIG. 2. Calculated trapping potentials for various MACRO-FORT powers along three axis (a-c) and a schematic of the experimental setup (d). The calculated trapping potentials in red, blue and black are shown in (a-c) for various combinations of the optical trap beams' powers, corresponding to (P_{wide}, P_{narrow}) =(12W, 0.09W), (3W, 0.058W), (1.25W, 0.20W) respectively. The 45 μm offset between the wide and narrow beams in the y-direction, marked by two-dotted lines, can be seen in (b). For (d), the magneto optical trap magnetic field coils are in green, dipole trapping beams in orange, MOT trapping beams in red, and imaging beam in purple. Not pictured are the bias coils, which are used to cancel the earth's magnetic field and apply constant offset fields. Gravity is along the positive y-axis.

Fig. 1a shows the calculated γ_{eff} given our initial conditions and evaporating to near the critical temperature T_c (defined from $k_B T_c = \hbar\bar{\omega}(N/1.202)^{1/3}$) for different values of η and nu. We find a region of optimal η and nu centered around $\eta = 8.95$, $\nu = 0.05$. For our MACRO-FORT setup, limitations in the laser power available restrict ν to be between 0.15 and 0.50. The large tolerance of the parameters when determining γ_{eff} allows for some flexibility in the experimental implementation of η and ν, and we have designed our experimental evaporation ramp to have $\eta \approx 8.6$ and $\nu = 0.22$, so as to preferentially avoid three-body losses while still maintaining a high γ_{eff}. As seen in Fig. 1b and c, loading more or less atoms initially in the dipole trap changes the ideal ν as well as the maximum γ_{eff} (while η is minimally affected by N_i). We note that we have assumed constant η and ν for optimizing the evaporation process. At the cost of additional complexity, η and ν can be varied during evaporation to achieve slightly more efficient evaporation. For the initial conditions of our experiment, we find that implementing a variable $\nu(t)$ during evaporation gives only a small gain (≈ 0.1) in the numerically computed γ_{eff}.

To experimentally generate the MACRO-FORT, we use a single-frequency, single spatial mode, Erbium fiber laser with wavelength at 1550nm (IPG Photonics ELR-50-1550-LP-SF). The wide dipole trap beam has a beam waist of 88 μm and 18 W of initial power (P_{wide}). The narrow beam (used to produce the "dimple" potential) has a waist of 20μm, 9W of initial power (P_{narrow}), crosses the wide beam at an angle of 66°, and is offset

45 μm radially from the wide beam's focus (see Fig. 2). To load the MACRO-FORT, we follow a procedure similar to Ref. [21], which was developed to allow for the loading of a dipole trap from a magneto-optical trap (MOT) even when the dipole trap laser creates a strong AC Stark shifts on the cooling transition of the MOT (up to ≈ 150 MHz blue-shifts for our experiment) [26]. When loading the MACRO-FORT [27], if only the wide beam is applied we observe $n = 1 \times 10^{11}$atoms/cm^3 and $T = 10$ μK. For such initial conditions, the Γ_{el} is too low for efficient evaporation. The addition of the dimple potential after loading increase Γ_{el}, aiding efficient evaporation [28–30]. After 500 ms hold time in the MACRO-FORT with the dimple on, there are 5×10^5 atoms at 60 μK and a density of 3.5×10^{12} atoms/cm^3.

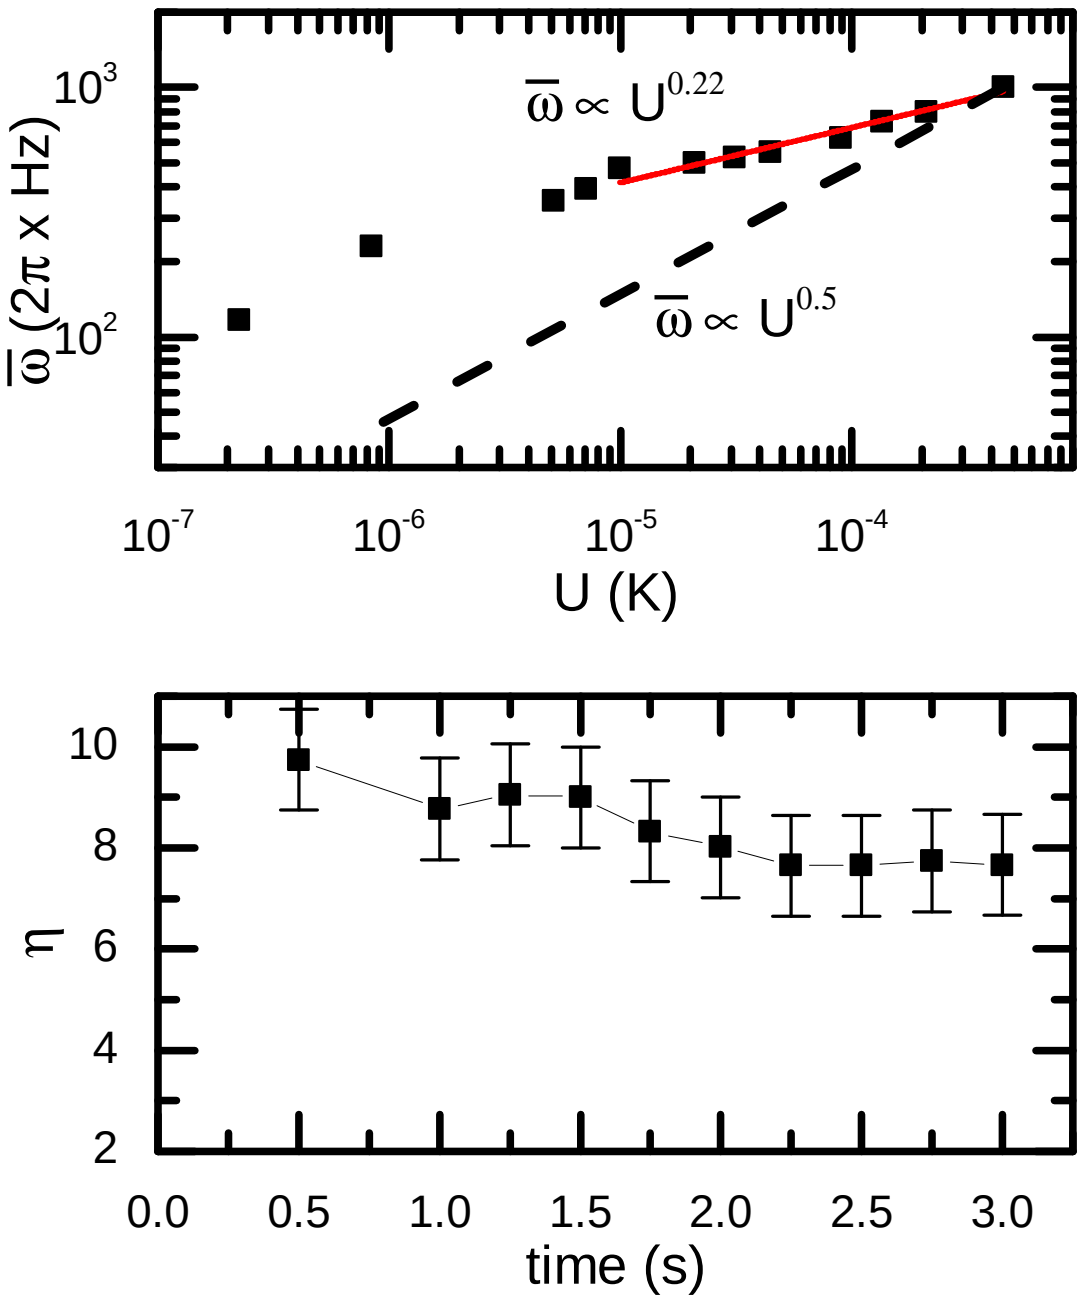

FIG. 3. (a) Measured average trap frequency ($\bar{\omega}$) verses trap depth (U) for the near-optimal evaporation trajectory used in our experiment. The trap frequencies were measured by the parametric heating method. The experiment used $\nu = 0.22$ for the first 3 seconds of evaporation. For comparison, the dashed line indicates the $\bar{\omega} \propto U^{0.5}$ relationship used in conventional optical evaporative cooling. (b) Extracted η during evaporation based on the T of atoms measured from time-of-flight, and trap depth U calculated (assuming ideal gaussian beams) from the measured dipole trap laser powers and beam geometry.

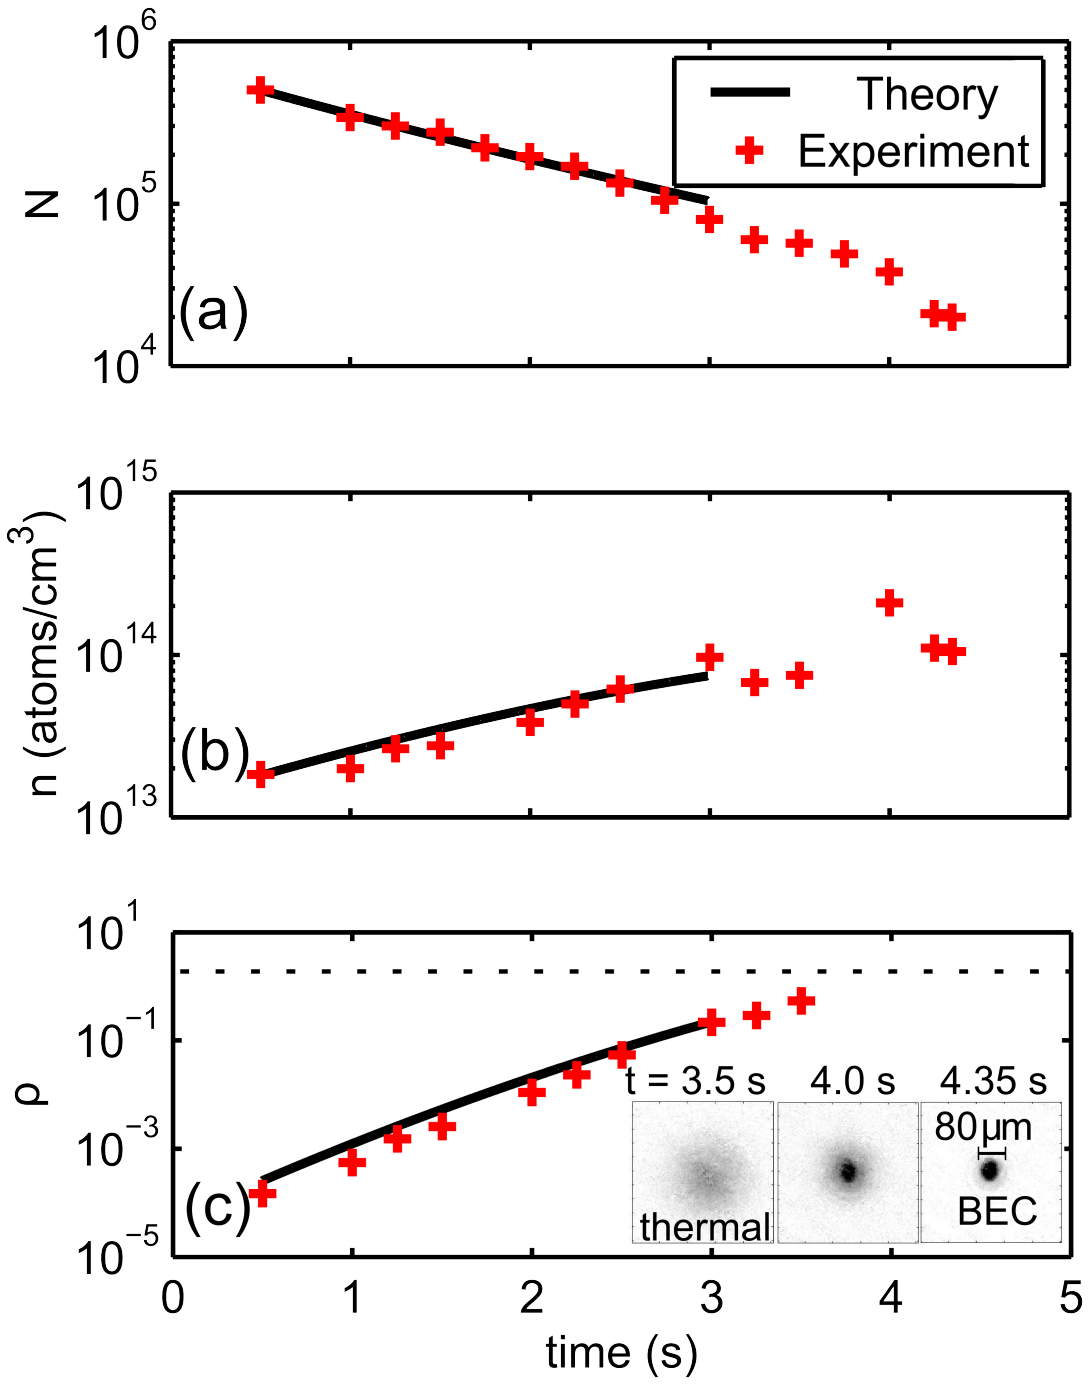

FIG. 4. The experimentally measured atom number (a), atomic density (b), and phase-space density (c), as functions of time during evaporation. The theoretical calculations utilize the model of Eqns. 1 and 2 for $\nu = 0.22$, $\eta = 8.6$, $\bar{\omega_i} = 2\pi \times 1000$ Hz, and assuming our experimental initial conditions. The slight overestimate of the theoretical n and ρ during the first 2.5 seconds is likely due to the presence of atoms in the "wings" of the narrow beam trap (e.g. see Ref. [22]). The insets in (c) show resonant absorption images (taken after 10 ms of time-of-flight expansion) of the atomic cloud at three different times along evaporation ramp, showing the thermal cloud to BEC transition.

We show the actual η and ν during the evaporation ramp in Fig. 3. Forced evaporation with $\nu = 0.22$ and $\eta \approx 8 - 10$ (noting the relative insensitivity of γ_{eff} to small deviations of η and ν from the optimal target values) was implemented by exponentially decreasing the power in both beams over the course of 3 seconds to 12 W and 0.068 W respectively, achieving a high efficiency of $\gamma_{eff} = 4.2$. At this point, there are 10^5 atoms at just over 1 μK (see Fig. 4). The average trap frequency is 475 Hz so $T_C \approx 900$ nK. Proceeding to evaporate in such a tight trap, however, would yield high 3-body losses. Thus, over the final 1.35 seconds, the power in the wide beam is lowered to 1.25 W and the narrow beam to 0.020 W. This results in a nearly pure BEC of 2×10^4 atoms in a trap with measured frequencies of $2\pi \times (60, 100, 270)$ Hz. During this final 1.35 seconds, due to the atom cloud being near the BEC transition, the evaporative process is aided by the bosonic enhancement [31, 32] and no longer well described by the classical evaporative theory of Eqns. 1 and 2. This yields efficiencies even higher than 4.2. After further experimental optimizations, we increased the initial number of atoms loaded in the dipole trap and achieved pure BECs of 4×10^4 atoms.

In summary, we have described a scheme to optimize the efficiency of evaporative cooling, where we have particularly tailored the relation of the trap frequency to trap depth during the evaporation process. As a result, we achieve a γ_{eff} of 4.2, the highest reported value to our knowledge for all-optical evaporation. Different from Refs. [15, 19, 21], we include atom losses in modeling the evaporative process and optimize both η and ν for our experimental conditions. Different from the evaporation optimization scheme in Ref. [13], we optimize the evaporation by tuning ν for the whole evaporation ramp, rather than changing η during evaporation. In addition, we have highlighted the utility of MACRO-FORTs that allow selecting the η and ν values for all-optical evaporation and note that BECs can be obtained even when starting from a small number (a few 10^5) trapped atoms. The method shown here of optimizing the efficiency by finding optimal η and ν is not specific to ^{87}Rb, and can be applied to achieve high γ_{eff} for any atomic species that is evaporatively cooled in optical traps.

We acknowledge P. Wang and Q. Ma for the initial design and construction of the dual-MOT apparatus and S. Dutta for helpful discussions. We are grateful for M. Olson's assistance with Fig. 2. We thank J.F. Clement, M. Zaiser, and M. Barrett for helpful communications. The research was supported by DURIP-ARO Grant W911NF-08-1-0265 and the Miller Family Endowment. AJO acknowledges support of the Dept. of Defense NDSEG Fellowship.

---

[1] S. Chu, J. E. Bjorkholm, A. Ashkin, and A. Cable, Phys. Rev. Lett. **57**, 314 (1986).

[2] R. Lovelace, C. Mehanian, T. Tommila, and D. Lee, Nature **318**, 30 (1985).

[3] N. Masuhara, J. M. Doyle, J. C. Sandberg, D. Kleppner, T. J. Greytak, H. F. Hess, and G. P. Kochanski, Phys. Rev. Lett. **61**, 935 (1988).

[4] M. H. Anderson, J. R. Ensher, M. R. Matthews, C. E. Wieman, and E. A. Cornell, Science **269**, 198 (1995).

[5] K. B. Davis, M. O. Mewes, M. R. Andrews, N. J. van Druten, D. S. Durfee, D. M. Kurn, and W. Ketterle, Phys. Rev. Lett. **75**, 3969 (1995).

[6] C. C. Bradley, C. A. Sackett, J. J. Tollett, and R. G. Hulet, Phys. Rev. Lett. **75**, 1687 (1995); C. C. Bradley, C. A. Sackett, and R. G. Hulet, Phys. Rev. Lett. **78**, 985 (1997).

[7] B. DeMarco and D. S. Jin, Science **285**, 1703 (1999).

[8] W. Ketterle and N. V. Druten (Academic Press, 1996) pp. 181 – 236.

[9] O. Luiten, M. Reynolds, and J. Walraven, Physical Review A , 381 (1996).

[10] E. L. Surkov, J. T. M. Walraven, and G. V. Shlyapnikov, Phys. Rev. A **53**, 3403 (1996).

[11] J. T. M. Walraven, in *Quantum dynamics of simple systems* (IOP: Bristol, 1996).

[12] C. A. Sackett, C. C. Bradley, and R. G. Hulet, Phys. Rev. A **55**, 3797 (1997).

[13] M. Yamashita, M. Koashi, T. Mukai, M. Mitsunaga, N. Imoto, and T. Mukai, Phys. Rev. A **67**, 023601 (2003).

[14] Additional heating and losses can result from off-resonant laser scattering and dipolar collisions. The effects on the energy and atom number due to these processes for our experimental system are small and thus omitted from this analysis.

[15] C.-L. Hung, X. Zhang, N. Gemelke, and C. Chin, Phys. Rev. A **78**, 011604 (2008).

[16] E. G. M. van Kempen, S. J. J. M. F. Kokkelmans, D. J. Heinzen, and B. J. Verhaar, Phys. Rev. Lett. **88**, 093201 (2002).

[17] E. Burt, R. Ghrist, C. Myatt, M. Holland, E. Cornell, and C. Wieman, Physical Review Letters **79**, 337 (1997).

[18] M. D. Barrett, J. A. Sauer, and M. S. Chapman, Phys. Rev. Lett. **87**, 010404 (2001).

[19] K. M. O'Hara, M. E. Gehm, S. R. Granade, and J. E. Thomas, Phys. Rev. A **64**, 051403 (2001).

[20] T. Kinoshita, T. Wenger, and D. S. Weiss, Phys. Rev. A **71**, 011602 (2005).

[21] J. F. Clement, J. P. Brantut, M. R. de Saint-Vincent, R. A. Nyman, A. Aspect, T. Bourdel, and P. Bouyer, Physical Review A **79**, 061406(R) (2009).

[22] K. Arnold and M. Barrett, Optics Communications **284**, 3288 (2011).

[23] M. Yamashita, Laser Physics **14**, 597 (2001).

[24] When modeling with these equations, it important to find the trap averaged values. Γ_{el} is often reported as $n\sigma\bar{v}$, but in a 3D harmonic potential is reduced by $2\sqrt{2}$. Similarly, since three-body collisions occur in the denser, less energetic regions of the trap, the average energy loss per atom from three-body collisions is two-thirds of the average energy of an atom in the trap with $\Gamma_{3B} = Ln_0^2/(3\sqrt{3})$. Using an analysis as that in Ref. [15], we experimentally confirmed that the dimensionality of evaporation is 3D.

[25] C.-L. Hung, *In Situ Probing of Two-Dimensional Quantum Gases*, Ph.D. thesis, University of Chicago (2011).

[26] This AC-Stark shift is due to the nearby $5P_{3/2}$ to $4D_{3/2}$ transition at 1529nm in ^{87}Rb. The $5S_{1/2}$ to $5P_{3/2}$ transition is used as the cooling transition in the MOT.

[27] A summary of our atom loading process: We first load $\geq 1 \times 10^8$ atoms in the MOT. During this time the cooling beams' detuning from the resonance, $\delta_{cooling}$, is set to -20 MHz with a total power of 70 mW, the repump beam is set to resonance and an intensity $I_{repump} = 1.8$ mW/cm^2, and the magnetic field gradient is set set to $G_B = 15$ G/cm. To maximize atoms loaded into the MACRO-FORT, we apply a four stage compression and cooling process. First, the $\delta_{cooling}$ is decreased in 10 ms to -30 MHz and held for 20 ms. Next, G_B is increased to 51 G/cm in 5 ms and held for 25 ms. Then, G_B is ramped to 1 G/cm in 5 ms. Simultaneously, $\delta_{cooling}$ is decreased to -35.5 MHz in 2 ms, and I_{repump} is instantly decreased to a few μW/cm^2. Finally, an optical molasses stage is applied for 1 ms, where I_{repump} is restored to 1.8 mW/cm^2, G_B is ramped entirely off, and $\delta_{cooling}$ is ramped to -130.5 MHz. At the start of the 50 ms dipole trap (MACRO-FORT) loading stage, $\delta_{cooling}$ is changed to -195 MHz, I_{repump} is dropped to a few μW/cm^2, and the FORT wide beam is turned on to full power (18 W). During that 50 ms, the FORT narrow beam is linearly

ramped on to 9 W. After loading for 50 ms, the MOT cooling beams are turned off with the repump beams turned off a few hundreds of μs before the cooling to optically pump the atomcs to the $F = 1$ ground state.

[28] D. M. Stamper-Kurn, H.-J. Miesner, A. P. Chikkatur, S. Inouye, J. Stenger, and W. Ketterle, Phys. Rev. Lett. **81**, 2194 (1998).

[29] T. Weber, J. Herbig, M. Mark, H.-C. Ngerl, and R. Grimm, Science **299**, 232 (2003).

[30] Z. Ma, C. Foot, and S. Cornish, Journal of Physics B **37**, 3187 (2004).

[31] H. J. Miesner, D. M. Stamper-Kurn, M. R. Andrews, D. S. Durfee, S. Inouye, and W. Ketterle, Science **279**, 1005 (1998).

[32] M. Köhl, M. J. Davis, C. W. Gardiner, T. W. Hänsch, and T. Esslinger, Phys. Rev. Lett. **88**, 080402 (2002).